

MOTORES INDUSTRIALES *PowerLift* PARA PORTONES SECCIONALES



Jorge Hirmas 2679 - Renca (+562) 2669 6040 info@merygates.cl
lunes a jueves 09:00 a 18:00 hrs. horario taller 9:00 a 17:00 hrs
viernes 09:00 a 17:00 hrs. horario taller 08:30 a 16:00 hrs



MERY.CL

Motores Industriales para Portones Seccionales

Model C60 /60N.M/650W



Central de comando


Model : Industrial Sectional Door C60
Rated Torque : 60N.M
Display : LCD Monitor




Motor Drive Unit

Model : Industrial Sectional Door C60
Power Supply : 1N~AC200-240
Default Line Length : 5M

DIMENSIONES CENTRAL DE COMANDO

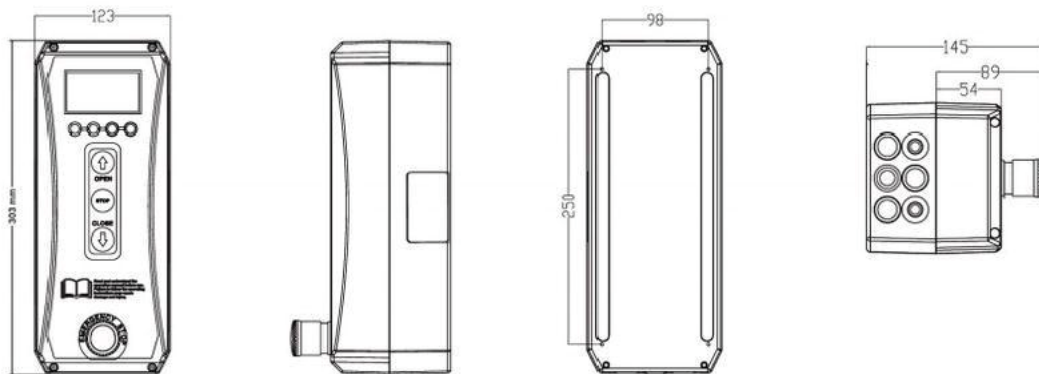

DIMENSIONES DE MOTOR

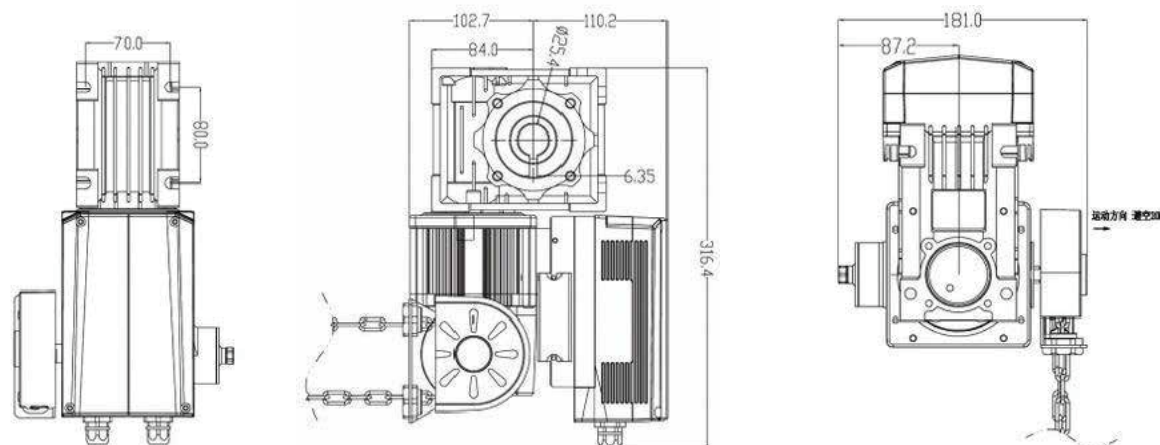

ESPECIFICACIONES

Basic Parameters	C60
Rated Torque	60N
Power	650W
Reducer Specifications	RV50 1:80
Output Rated Speed	30 rpm
Recommended Max Matching Area	30m ²
Power Supply	1N~AC110V/220V/380V
Frequency	50/60 Hz
Current	12A~110V/6A~220V
Max Limit Circle	50
Motor IP Level	IP54
Hand Chain Length	4m (8m maximum)
Default Line Length	5m
Working Temperature	-20°C-50°C
Functions Features	
Display	LCD Monitor
Limit mode	Electronic Limit
Slow Start and Slow Stop Function	Standard Configuration
Self-Diagnosis Function	Standard Configuration
Maintenance Reminder	Standard Configuration
RS485	Optional
Multiple Operating Modes	Electronic/Log/Hand Chain
Control Panel Functions	
Opening Speed Setting	Stepless Speed Regulation
Closing Speed Setting	Stepless Speed Regulation
Opening Deceleration Interval Setting	●
Closing Deceleration Interval Setting	●
Automatic Closing Time-Delay (Seconds)	0-240(0:Disable automatic door closing)
Safety Signal Failure Height Setting	●
Running Status Display Option	●
Extensions of Control Panel Functions	
Error Prompt	●
Data Statistics	●
Error Log	●
Maintenance Reminder	●
Motor Running Reverse	●
Interface Logic Switching(NC/NO)	●
Interface of Control Cabinet	
Networking Physical Interface	RS485(only available in Plus version)
Manual Opening Signal Input	●
Manual Closing Signal Input	●
Manual Stop Signal Input	●
Safety Protection Signal Input	Reverse Opening
Door In Door Signal Input	●
Emergency Stop Input	●
Programmable Relay Output	2 Groups



4m (8m Maximum)

Industrial Sectional Door C60

Motores Industriales para Portones Seccionales

Model C90 /90N.M/1100W



Central de comando

Model : Industrial Sectional Door C90

Rated Torque: 90N.M

Display : LCD Monitor




Motor Drive Unit

Model : Industrial Sectional Door C90


PowerSupply: 1N~AC200-240

Default Line Length : 9M

DIMENSIONES CENTRAL DE COMANDO

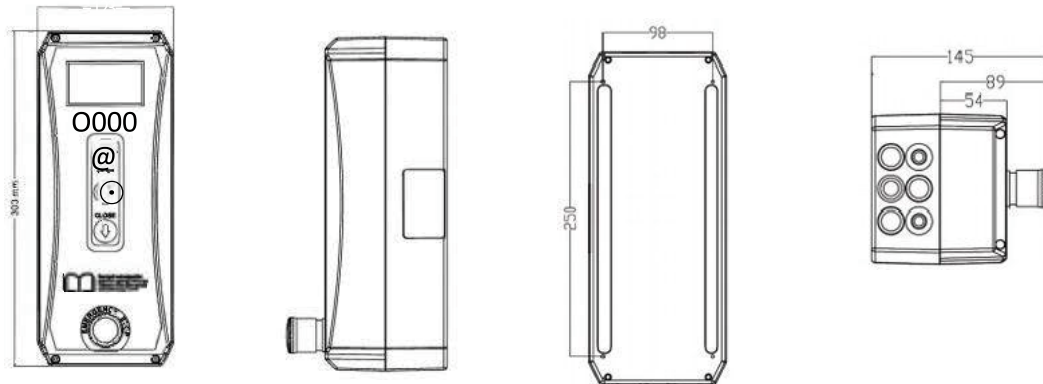

DIMENSIONES DE MOTOR

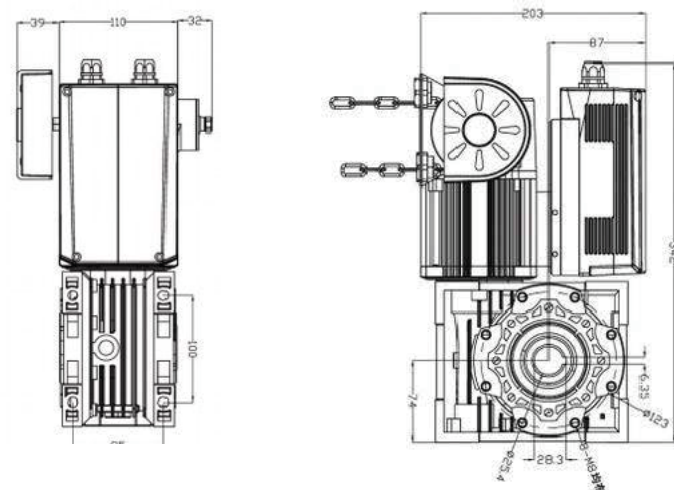

ESPECIFICACIONES

Basic Parameters		C90
Rated Torque		90N.m
Power		1100W
Reducer Specifications		RV63 1:80
Output Rated Speed		30 rpm
Recommended Max Matching Area		40m ²
Power Supply		1N~AC110V/220V/380V
Frequency		50/60 Hz
Current		19A~110V/10A-220V
Max Limit Circle		40
Motor IP Level		IP54
Hand Chain Length		8m
Default Line Length		9m
Working Temperature		20°C-50°C
Functions Features		
Display		LCD Monitor
Limit mode		Electronic Limit
Slow Start and Slow Stop Function		Standard Configuration
Self-Diagnosis Function		Standard Configuration
Maintenance Reminder		Standard Configuration
RS485		Optional
Multiple Operating Modes		Electronic/Log/Hand Chain
Control Panel Functions		
Opening Speed Setting		Stepless Speed Regulation
Closing Speed Setting		Stepless Speed Regulation
Opening Deceleration Interval Setting		●
Closing Deceleration Interval Setting		●
Automatic Closing Time-Delay (Seconds)		0-240(0:Disable automatic door closing)
Safety Signal Failure Height Setting		●
Running Status Display Option		●
Extensions of Control Panel Functions		
Error Prompt		●
Data Statistics		●
Error Log		●
Maintenance Reminder		●
Motor Running Reverse		●
Interface Logic Switching(NC/NO)		●
Interface of Control Cabinet		
Networking Physical Interface		RS485(only available in Plus version)
Manual Opening Signal Input		●
Manual Closing Signal Input		●
Manual Stop Signal Input		●
Safety Protection Signal Input		Reverse Opening
Door In Door Signal Input		●
Emergency Stop Input		●
Programmable Relay Output		2 Groups



8m (Hand Chain Length)

Industrial Sectional Door C90

Jorge Hirmas 2679 - Renca (+562) 2669 6040 info@merygates.cl
lunes a jueves 09:00 a 18:00 hrs. horario taller 9:00 a 17:00 hrs
viernes 09:00 a 17:00 hrs. horario taller 08:30 a 16:00 hrs

MERY.CL

A photograph of a large industrial building with a corrugated metal roof and a series of white bay doors. The building is set against a cloudy sky. A dark blue semi-transparent rectangle is overlaid on the right side of the image, containing the text.

MOTORES INDUSTRIALES
PowerLift
PARA PORTONES SECCIONALES